


ZENIT 3.6

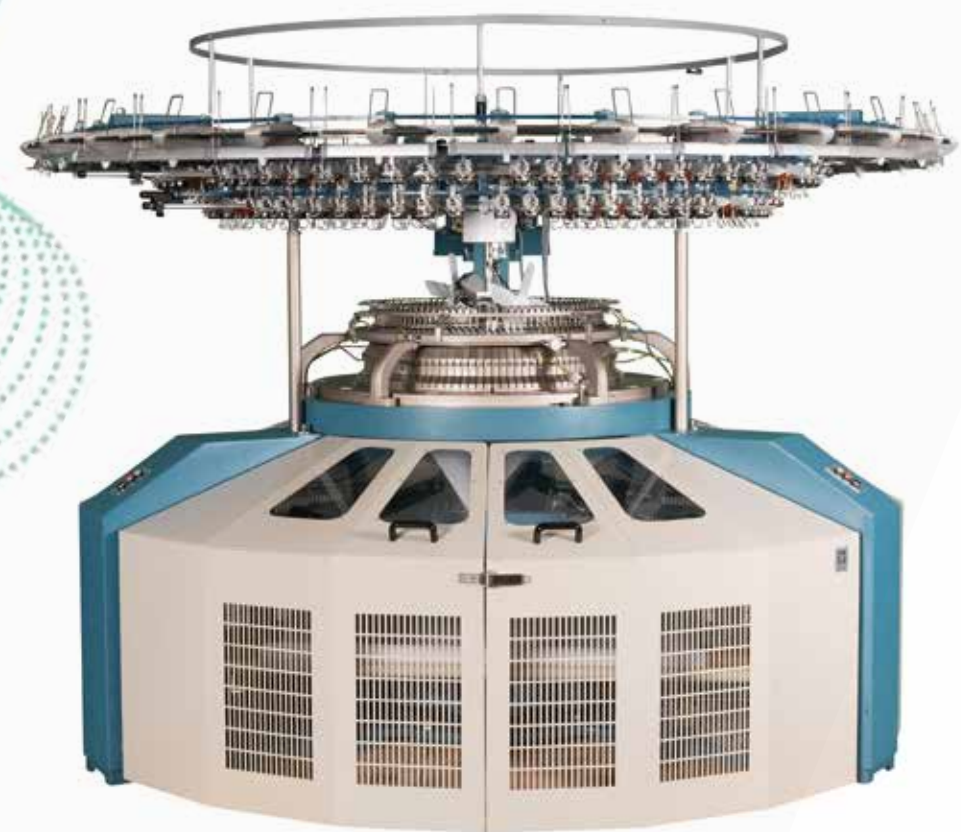

Higher productivity --- Easy access to knitting head --- User friendly --- GB/T 19001-2016 idt ISO9001:2015

更高的生产效率 --- 便于进入编织区域 --- 更好的客户体验 --- 符合国际标准

SANTONI (SHANGHAI) KNITTING MACHINERY CO.,LTD
Add: No.111, East Shanfu Road, Jinshan, Shanghai 201508, China
Tel: +8621-57240777 Fax: +8621- 3721 2624 Website: www.santoni.cn

圣东尼 (上海) 针织机器有限公司
地址: 上海市金山区山富东路111号 邮编: 201508
总机: +8621-57240777 传真: +8621-3721 2624 网站: www.santoni.cn

 **SANTONI**™ 推荐的织针为 **GROZ-BECKERT®**
is recommending needles from




ZENIT 3.6

简介

筒径	30	32	34
针距	20 - 44		
路数	108	114	122
最高转速	32	30	28

		布卷/毫米	机架尺寸/毫米
机架	标准圆筒机架	500	
	大卷装圆筒机架	780	+ 500
	大卷装圆筒机架	1080	+ 800
	标准开幅机架	380	
	大卷装开幅机架	600	+ 300

- 每英寸 3.6 路 4 跑道单面针织圆机, 可以编织或不编LYCRA。
- 可以编织带有LYCRA 的彩条布 3 根的添纱织物。
- 机器装有经济而通用的织针, 易于采购。
- 精确设计的沉降片三角, 双重控制沉降片和沉降片片尾, 不仅确保成圈均匀, 而且减少沉降片的磨损。
- 独立三角座由特殊铝合金(Ergal) 制成, 具有超强散热功能。
- 牵拉装置的自动定位使落布卷更加快捷。
- 同步成圈三角调节。
- 可以在圆筒机架或开幅机架(标准款和大卷装款) 安装 马达控制剪裁开幅刀和斜向导辊(Vignoni 专利)。
- 只需简单操作即可将开幅机架换为圆筒机架。
- 非常紧凑的开幅机架, 便于进入编织区域。

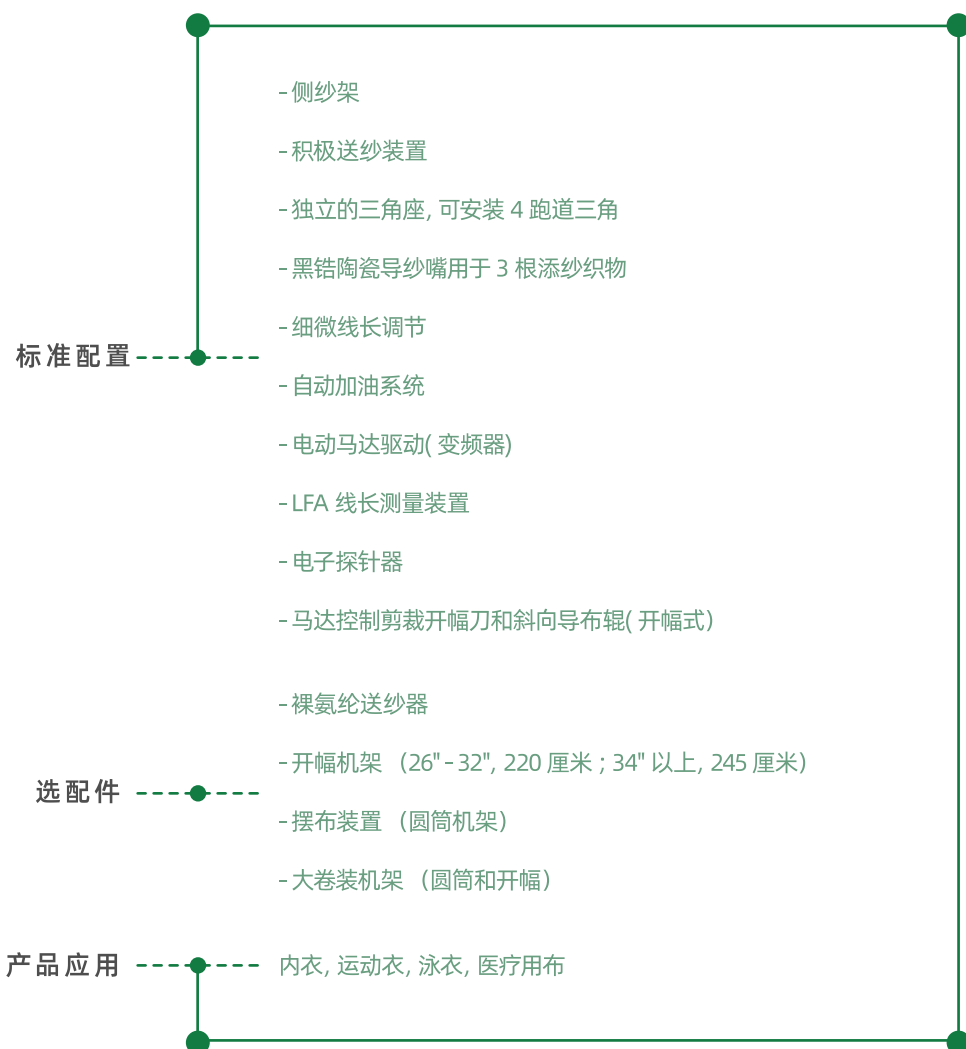

ZENIT 3.6

BRIEF

Diameter	30	32	34
Gauge	20 - 44		
Number of feeds	108	114	122
MaximumSpeed(RPM)	32	30	28

		Fabric roll/MM	Frame size/MM
Frame	Tubular standard	500	
	Tubular industrial	780	+ 500
	Tubular industrial	1080	+ 800
	Open width standard	380	
	Open width industrial	600	+ 300

- Single jersey machine with 3.6 feeders per diameter inch capable to knit up to 4 track structures, with/without lycra.
- Ideal to knit feeder stripes with lycra and three yarn plaited fabrics.
- Machine is equipped with economical & common needles easily available all over the word.
- Double guidance sinker cams in combination with well designed sinkers with tail ensures uniform loops all over the fabric & less wear & tear of sinkers.
- Individual cam shells made by special aluminum alloy(ergal) having a great heat dissipation property.
- Automatic positioning of the fabric take down for quick removal of fabric roll.
- Centralized stitch control.
- Available with tubular as well as Open width frame(standard and industrial)equipped with motorized slitting and opening system by oblique bars(Vignoni patent).
- Open version can easily be converted into tubular from by a simple operation.
- Very compact open frame for an easy access to the knitting head.

